

Model AMT Dewpoint Hygrometer

4-20mA Loop Powered Transmitter

Features

- 2 Wire Loop Powered Dewpoint Transmitter
- Overall Range -120°C to +20°C Dewpoint
- Accuracy $\pm 2^\circ\text{C}$ Dewpoint
- AUTOMATIC CALIBRATION
- Can be Configured for Linear 4-20mA signal in:
°C & °F Dewpoint, ppm(v), ppb(v), g/m³, lb/MMSCF
- Temperature Compensation
- Failure Diagnostics
- Long Term Stability
- Fast Reponse
- IP 66 / NEMA4X Protection



Model AMT Dewpoint Hygrometer is a two wire 4-20mA loop powered transmitter, used for continuous measurement of humidity in a process gas or compressed air, which will output a linear 4-20mA signal corresponding to the dewpoint temperature. The Model AMT transmitter can also be factory configured to output a 4-20mA linear signal for any other moisture unit e.g. ppm(v), ppm(w), g/m³, lb/MMSCF etc.

The Ultra High Capacitance sensing element is long lasting and offers excellent sensitivity, repeatability and response speed. Each unit is supplied with a Certificate of Calibration, traceable to International Humidity Standards, validating accuracy to $\pm 2^\circ\text{C}$ dewpoint.

The transmitter also incorporates an Automatic Calibration (AUTOCAL) feature, which allows the user to carry out a field calibration / span check. The AUTOCAL feature is operated by means of two small button switches built within the transmitter enclosure. To avoid tamper, the switches are locked in normal use and can only be activated by following a special routine.

The integral RISC microprocessor circuitry of the Model AMT transmitter allows high resolution with advanced self-diagnostics for fault conditions. It also enables periodic re-calibration of the moisture sensor, storing calibration data within the fully self contained unit. Loop powered by a 7V to 28V dc source, the Model AMT transmitter will provide a linear 4-20mA signal over the chosen range.

The mechanics of the Model AMT transmitter have been designed to cope with extreme environmental conditions. The rugged stainless steel construction offers protection to IP66 (NEMA4X), with the transmitter electrical connections made via a secure industrial connector.

Model AMT transmitter can withstand 35,000 kPa (350bar) maximum pressure and by employing a low resistance cable, the transmitter can be located at significant distances, in excess of 1000 metres, from the control room.

Designed with the operator in mind, for reliable and accurate measurements, the Model AMT transmitter is extremely easy to install and operate, requiring little or no maintenance.

The Model AMT transmitter is supplied with a Certificate of Calibration, an instruction manual and 2m connecting cable.

Alpha Moisture Systems

Alpha House, 96 City Road
Bradford, BD8 8ES
England



Tel	+44 (0) 1274 733100
Fax	+44 (0) 1274 733200
Email	info@amsystems.co.uk
Website	www.amsystems.co.uk

SPECIFICATIONS

Model AMT Dew Point Hygrometer

4-20mA Loop Powered Transmitter

TRANSMITTER TYPE: 2 Wire, 4-20mA Loop Powered Transmitter

OUTPUT SIGNAL: 4 to 20mA Linear

OPERATING VOLTAGE: 7V - 28V dc. Reverse polarity protected.

MAXIMUM SERIES RESISTANCE: = {40 x (Supply Voltage - 7)} ohms

SENSING ELEMENT: Ultra High Capacitance - Aluminium Oxide Type

RANGES:

SD: -100°C to 0°C (-148°F to +32°F) dew point	} 0.1°C / °F resolution
ZD: -100°C to +20°C (-148°F to +68°F) dew point	
TD: -120°C to 0°C (-184°F to +32°F) dew point	
HD: -65°C to +20°C (-85°F to +68°F) dew point	

SP: 1 to 1000 ppm(v)	1ppm resolution
MP: 0.1 to 100.0 ppm(v)	0.1ppm resolution
LP: 0.01 to 10.00 ppm(v)	0.01ppm resolution

PB: 1 to 1000 ppb(v)	1ppb resolution
----------------------	-----------------

GH: 0.01 to 10.00 g/m ³	0.01g/m ³ resolution
GL: 0.001 to 1.000 g/m ³	0.001g/m ³ resolution

LB: 0.1 to 100.0 lbs/MMSCF	0.1 lbs/MMSCF resolution
----------------------------	--------------------------

NOTE: ppm, ppb, g/m³ & lbs/MMSCF ranges are stated at atmospheric pressure. Model AMT Transmitter can be configured to provide corresponding ranges for operation at other constant pressures. This must be stated at time of order.

AUTOCAL: Field calibration / Span check facility. Activated and operated via two button switches on the Transmitter body. Locked in normal operating mode to avoid tamper.

FACTORY CALIBRATION: Supplied with Certificate of Calibration traceable to NPL / NIST

ACCURACY: ± 2°C dew point (NPL / NIST traceable for range -90°C to +20°C)

TEMPERATURE COEFFICIENT: Temperature compensated for operating range.

RESOLUTION: 6 micro-amps

REPEATABILITY: Better than ±0.3°C dew point

OPERATING TEMPERATURE: -20°C to +60°C

STORAGE TEMPERATURE: -20°C to +70°C

OPERATING PRESSURE: From 1kPa (0.01 barA) to Maximum 35,000kPa (350 barA)

OPERATING HUMIDITY (External): Maximum - 95% RH Non-condensing

RESPONSE TIMES:

Wet to Dry: -20°C to -60°C - less than 120 secs.

Dry to Wet: -120°C to -20°C - less than 20 secs.

SAMPLE FLOW RATE: Flow independent but ideally 2 to 5 litres per minute. Max: 25 litres/min.

CABLE TERMINATIONS: IP66 (NEMA4X) rated, size C, DIN EN 175301 connector at the Transmitter and other end terminated with bootlace ferrules.

CABLE: Supplied with 2m standard cable. Normal diameter 3.4mm, 92 ohms/km at 20°C

ELECTROMAGNETIC COMPATIBILITY (EMC):

Immunity: Complies with EN 61000-6-1:2001

Emissions: Complies with EN 61000-6-3:2000

WARM UP TIME: 10 seconds

FAULT CONDITIONS:

Open Circuit / Under Range: Output drives to 20.5mA

Short Circuit / Over Range: Output drives to 21.0mA

Short Circuit / Over Range: Output drives to 21.0mA

ISOLATION: Sensing element connected to the 4-20mA loop but isolated from Transmitter body.

TRANSMITTER ENCLOSURE: 316 Stainless steel body with size C, DIN EN 175301 connector.

SENSOR PROTECTION: 316 Sintered stainless steel filter - 50 micron

PROBE MATERIAL (WETTED PARTS): 316 Stainless Steel

WEATHERPROOF CLASSIFICATION: IP66 / NEMA4X when Connector mated to Transmitter.

MECHANICAL CONNECTION: 3/4" UNF (16tpi) with integral Viton "O" ring seal.

MECHANICAL WARRANTY: 24 months in case of faulty workmanship and defective parts.

CALIBRATION WARRANTY: 12 months.

WEIGHT: 175grams (includes connector)

ORDERING INFORMATION

Dew Point Hygrometer Model AMT - [XX]

Supplied with connector and 2m cable

XX = Choose required range:

SD: -100°C to 0°C (-148°F to +32°F) dew point

ZD: -100°C to 20°C (-184°F to +32°F) dew point

TD: -120°C to 0°C (-148°F to +68°F) dew point

HD: -65°C to +20°C (-85°F to +68°F) dew point

SP: 1 to 1000 ppm(v)

MP: 0.1 to 100.0 ppm(v)

LP: 0.01 to 10.00 ppm(v)

PB: 1 to 1000 ppb(v)

GH: 0.01 to 10.00 g/m³

GL: 0.001 to 1.000 g/m³

LB: 0.1 to 100.0 lbs/MMSCF

E.g. Transmitter with range -100 to +20 °C dew point, order: Model AMT-TD

Connection Cable Model CAB-AMT-[XXX]

XXX = Choose required length of cable

Leave Blank: 2m (Included with Model AMT)

XXX: Insert cable length in metres

(Available in 10m,15m,25m,50m,75m & 100m lengths)

E.g. For 60 metres of cable, order: Model CAB-AMT-75

Model SH-AMT Sensor Holder (Optional)

(Flow Through Sample Cell)

MATERIAL OF CONSTRUCTION: 316 grade stainless steel.

PORTS: Inlet and outlet both 1/8" NPT F

PIPE FITTINGS: 2 x Swagelok® male pipe fittings. (1/4", 1/2" or 6mm OD - inlet / outlet fitting, size to be stated at time of order)

MOUNTING PLATE: 68 x 54 x 3mm Passivated mild steel plate with 2 fixing holes - 5.5mm diameter

WEATHERPROOF CLASSIFICATION: IP66 / NEMA4X - with Model AMT transmitter installed.

WEIGHT: 500grams (includes 2 fittings and mounting plate)

ORDERING INFORMATION

Sensor Holder Model SH-AMT - [X]-[X]

Supplied with Mounting Plate

X = Choose Inlet Pipe Fitting

0: None

4: 1/4"

8: 1/8"

6: 6mm

X = Choose Outlet Pipe Fitting

0: None

4: 1/4"

8: 1/8"

6: 6mm


E.g. For Sensor Holder with two 1/4" fittings, order: Model SH-AMT-4-4




Alpha Moisture Systems	Tel	+44 (0) 1274 733100
Alpha House, 96 City Road	Fax	+44 (0) 1274 733200
Bradford, BD8 8ES	Email	info@amsystems.co.uk
England	Website	www.amsystems.co.uk

Dimensions

Model AMT Dewpoint Hygrometer 4-20mA Loop Powered Transmitter

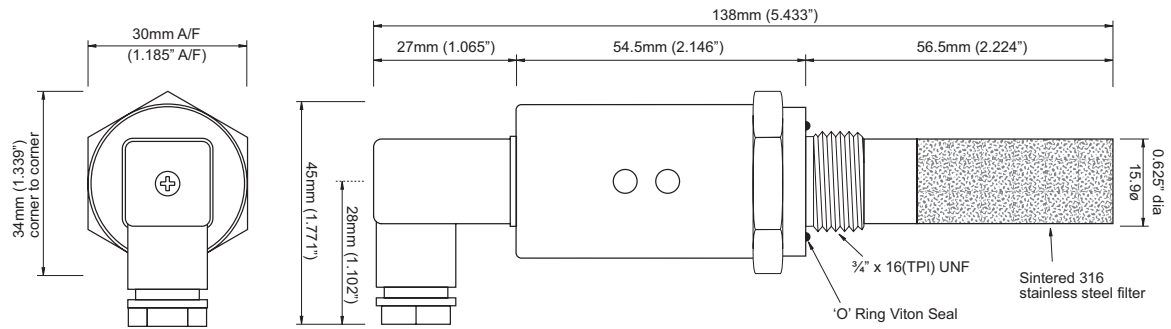

Model SH-AMT Sensor Holder Flow Through Sample Cell

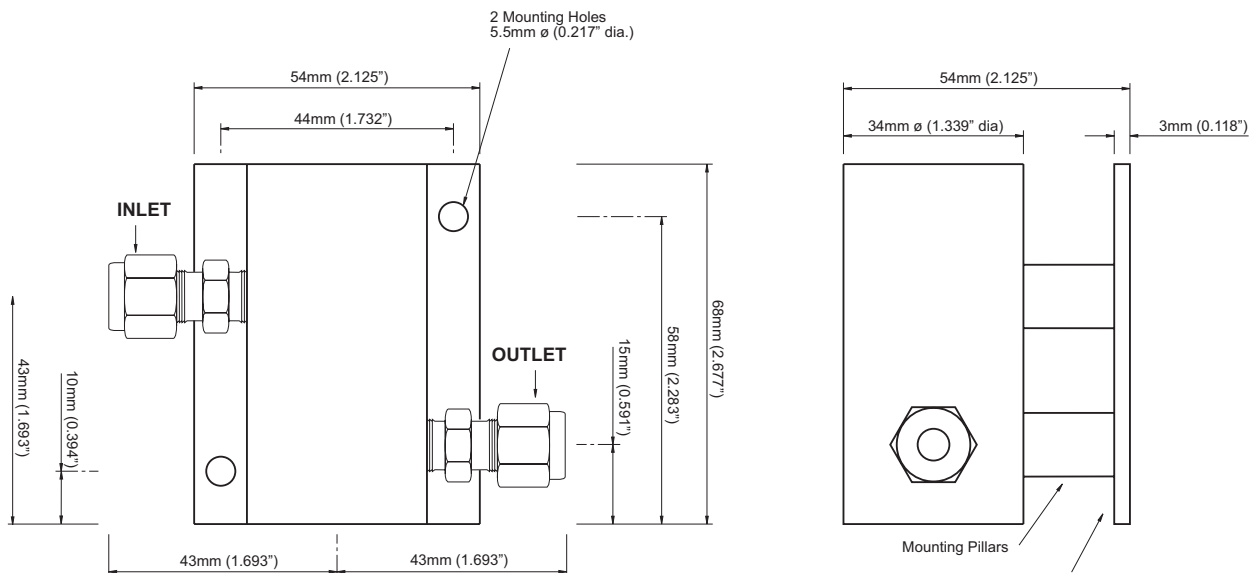

NOTE. The Assembly is shown with 1/4" OD tube fittings. The dimension across the tube fittings will vary for all other size fittings.

Product specification may be subject to change, without prior notice, as part of our ongoing product development programme.

Alpha Moisture Systems
Alpha House, 96 City Road
Bradford, BD8 8ES
England



Tel +44 (0) 1274 733100
Fax +44 (0) 1274 733200
Email info@amsystems.co.uk
Website www.amsystems.co.uk